







Peregrine Coolant Heater: XP-Type (415V)

Pumped

PEREGRINE XP-type 230V and 415V coolant heaters are fitted with a pump to force heated water around the engine. They are ideally suited to large diesel engines where one, two or more heaters may be needed on a single engine and/or where there is the requirement for alarm operation if the heater or power supply fails.

All XP-type heaters are fitted with twin thermostats set at 50°C adjustable, one operating the heater while the second is set a few degrees lower to switch an independent alarm circuit should the coolant temperature fall below a pre-set temperature.



Available in the following size connections:

BSP: ½", ¾", 1"

Model	P4XLPZ	P6XLPZ	P7XLPCZ	P9XLPCZ	P10XLPCZ	P12XLPCZ	
Wattage	1500	2250	3000	4500	6000	7500	
Weatherproof	No						
Voltage	415v AC						
Fluid	Water*/Coolant Mix 50%/50% or specialised coolant						
Connection Options	Hose: 13mm (½"), 19mm (¾") BSP: 25.4mm (1")						
Pump Type	35/3, magnetic drive, PPS housing, constant flow						
Heater Body Diameter	101mm						
Heater Body Length	366mm						
Overall Heater Length	520mm						
Туре	Triple Element with Control Thermostat						
Thermostat Range	A45, ranged 35°C - 85°C, set 60°C						
Configuration	Horizontal with 2 x Hose Connections						
Cable	2m x 2.5 ² single wires with 1676mm flexible Kopex					2m x 4 ² single wires with 1676mm flexible Kopex	
Heater Finish	Zinc passivated plating						
Supplied	Fixed mountings 9" x 2" x 8mm						

^{*} The use of deionised water will prevent limescale build-up and extend the life of the heater.

Shipping/Warranty Information				
Shipped Dimensions (mm)	620 (L) x 470 (W) x 480 (H)			
Shipped Weight	15Kg			
Warranty	Standard 12 months from delivery			
























Peregrine Coolant Heater: XP-Type (415V)

Pumped

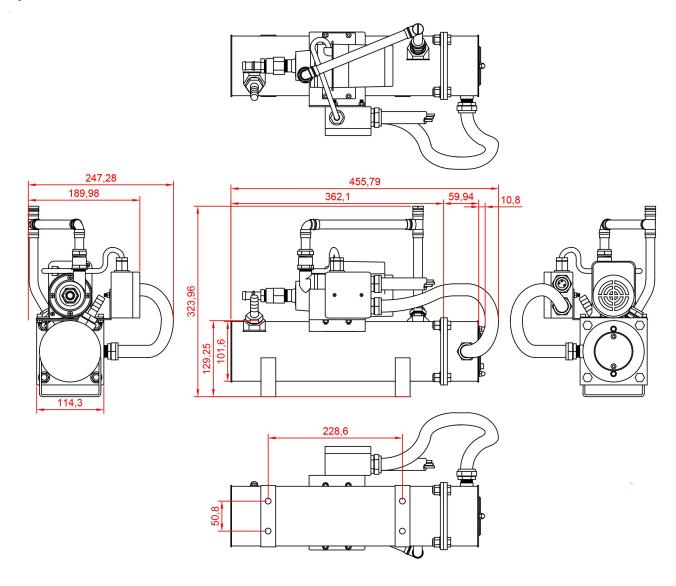

Shipping/Warranty Information				
Shipped Dimensions (mm)	620 (L) x 470 (W) x 480 (H)			
Shipped Weight	15Kg			
Warranty	Standard 12 months from delivery			











