



## Peregrine Anti-Condensation Heaters


Our range of Anti-Condensation heaters are available from 20 to 120 watts and have been developed for use in switch and control gear cabinets where a low wattage heater is required to eliminate humidity. Other useful applications include:

- Caravans/motorhomes
- Garages/sheds
- Toolboxes and cabinets

They contain a vitreous enamelled resistor mounted within a perforated sheet steel case. The cover is retained by only two screws so that it can be easily removed for wiring. The heating element is held in place by a tie rod in conjunction with a centring device pressed in to the end plate. There is a cable entry grommet at each end and the connections are to terminals on the element end bands via M4 screws or 6.3mm push on receptacles. Four 6mm Ø fixing holes are arranged in the base of the enclosure.

Type	Watts	Heating Element °C	Enclosure °C	% of Rated Power
PACH38	20	160	60	44
PACH38	30	208	90	67
PACH37	20	85	45	22
PACH37	40	155	65	44
PACH37	60	209	93	67
PACH37	80	265	120	89
PACH35	80	192	71	53
PACH35	100	207	85	67
PACH35	120	246	99	80

Type	Dimensions	Standard	Standard
PACH38	65mm x 19mm	20, 30	110, 230
PACH37	121mm x 70mm	20, 40, 60, 80	110, 230
PACH35	191mm x 146mm	80, 100, 120	110, 230

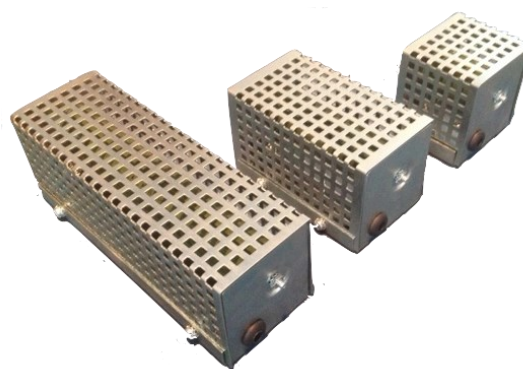

Shipping/Warranty Information	
Shipped Dimensions (mm)	TBA
Shipped Weight	TBA
Warranty	Standard 12 months from delivery



Designed and Built in the UK

+44 (0)20 8848 1912  
 sales@preheat.co.uk  
[www.preheat.co.uk](http://www.preheat.co.uk)

**PREHEAT**  
 ENGINEERING LTD

© Preheat Engineering Ltd. All rights reserved. Specifications subject to change without notice.